

type number: **DSOS 8_ZNCR** for threaded rod ZT 8
DSOS 10_ZNCR for threaded rod ZT 10

product description: The DSOS bracket is used to install the threaded rod and attach it to trapezoidal sheets.

The DSOS includes an M8 or M10 regulating nut.

The DSOS 8 or DSOS 10 must be chosen depending on which threaded rod is used, the ZT 8 or ZT 10.

To fasten it to a trapezoidal ceiling the hanger is fitted with an M8x120 mm cross pin. The pin has a washer and nut on both ends.

The max. allowable load is 130 kg.



surface finish: ZNCR - Bichromatic galvanised

sales amount: á 1 pc

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

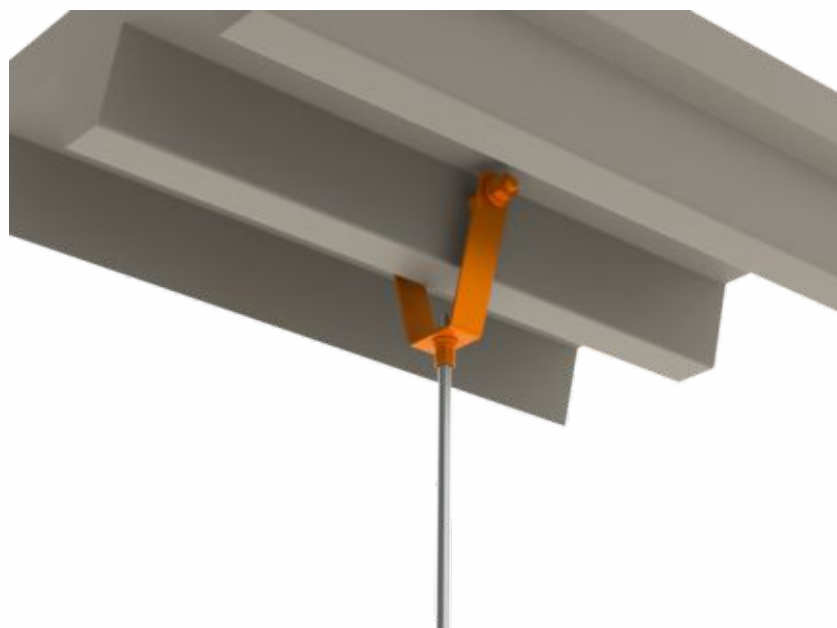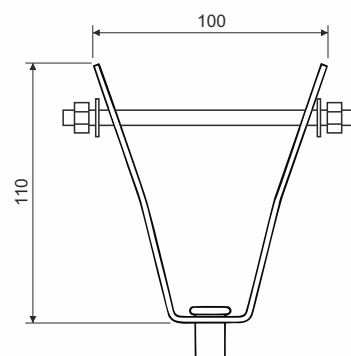

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Risk of system collapse

It is essential to strictly adhere to the maximum load limits for individual cable support systems and ensure proper installation according to the installation manual. The load capacity charts for each system are provided in the manufacturer's catalog, available in printed form or on the manufacturer's website. The specified load limits do not account for any additional loads, such as snow, wind, or seismic forces.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



DSOS



cardboard