

type number: **VKO ...**

product description: This cover is used to cover the low elbow KO.
 To fix the cover use 4 pcs of cover fixtures VU
 All coated covers S and ZM and coated covers F with a width of 50 - 200 mm are supplied straight. They are constructed from one piece of sheet metal with cut sides for shaping during assembly.
 Coated covers F with a width of 300 - 600 mm are supplied already bent in the shape of a rising elbow.
 These items can also be ordered in a varnished version.




surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)
 ZM - galvanized steel with admixture of magnesium and aluminum according to EN 10346, EN 10143, protective layer 18-31 µm

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R
 DIN 4102-12 E 90
 STN 92 0205 PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

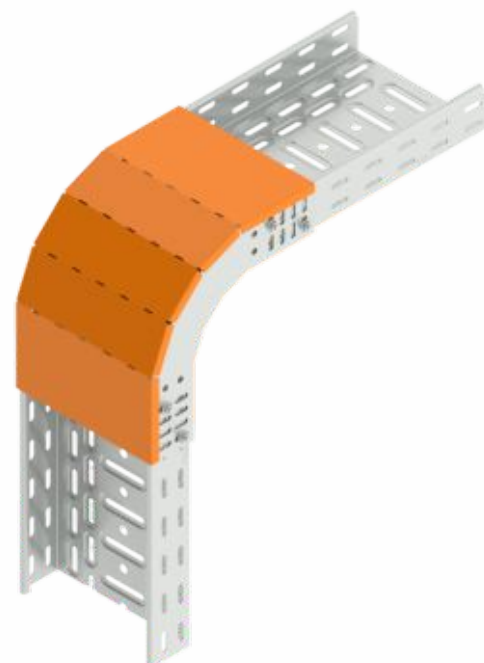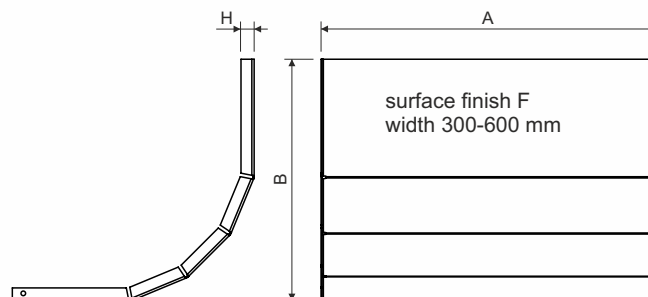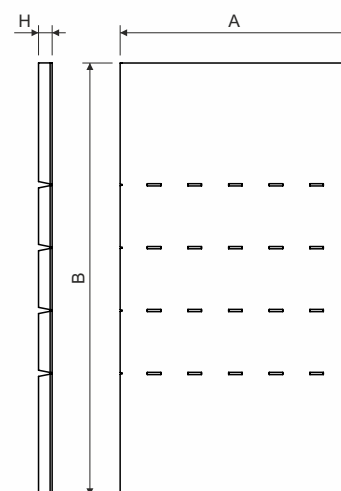

type number	for width of cable tray (mm)	for height of cable tray (mm)	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
VKO 90X35X50_S	50	35	54	383	12	0,55	0,12	
VKO 90X35X50_F			55			0,80	0,23	
VKO 90X35X75_S	75	35	79	383	12	0,55	0,17	
VKO 90X35X100_S	100	35	104	383	12	0,55	0,21	
VKO 90X35X150_S	150	35	154	383	12	0,55	0,29	
VKO 90X35X200_S	200	35	205	383	12	0,80	0,55	
VKO 90X35X300_S	300	35	305	383	12	1,00	0,99	
VKO 90X60X50_S	50	60	54	423	12	0,55	0,14	🔥
VKO 90X60X50_F			55			0,80	0,23	🔥
VKO 90X60X50_ZM			55			0,75	0,20	🔥
VKO 90X60X75_S	75	60	79	423	12	0,55	0,18	🔥
VKO 90X60X100_S	100	60	104	423	12	0,55	0,23	🔥
VKO 90X60X100_F			105			0,80	0,39	🔥
VKO 90X60X100_ZM			105			0,75	0,31	🔥
VKO 90X60X150_S	150	60	154	423	12	0,55	0,31	🔥
VKO 90X60X150_F			155			0,80	0,54	🔥
VKO 90X60X200_S	200	60	205	423	12	0,80	0,60	🔥
VKO 90X60X200_F						0,80	0,70	🔥
VKO 90X60X200_ZM						0,75	0,55	🔥
VKO 90X60X300_S	300	60	305	423	12		0,87	🔥
VKO 90X60X300_F				246		1,00	1,01	🔥
VKO 90X60X300_ZM				423			0,87	🔥
VKO 90X60X400_S	400	60	405	423	15	1,00	1,45	🔥
VKO 90X60X400_F				246			1,68	🔥
VKO 90x60x400_ZM				423			1,45	🔥
VKO 90X60X500_S	500	60	505	423	15	1,00	1,78	🔥
VKO 90X60X500_ZM				423			1,78	🔥
VKO 90X60X600_S	600	60	605	423	15	1,20	2,17	🔥
VKO 90X85X100_S	100	85	104	462	12	0,55	0,25	
VKO 90X85X150_S	150	85	154	462	12	0,55	0,39	
VKO 90X85X200_S	200	85	205	463	12	0,80	0,66	
VKO 90X85X300_S	300	85	305	463	12	1,00	1,19	
VKO 90X85X400_S	400	85	405	463	15	1,00	1,58	
VKO 90X110X150_S	150	110	154	502	12	0,55	0,38	🔥
VKO 90X110X150_F			155			0,80	0,65	🔥
VKO 90X110X200_S	200	110	205	502	12	0,80	0,72	🔥
VKO 90X110X200_F						0,80	0,83	🔥
VKO 90X110X200_ZM						0,75	0,70	🔥
VKO 90X110X300_S	300	110	305	502	12	1,00	1,30	🔥
VKO 90X110X300_F				296			1,51	🔥
VKO 90X110X300_ZM				502			1,30	🔥
VKO 90X110X400_S	400	110	405	502	15	1,00	1,72	🔥
VKO 90X110X400_F				296			1,99	🔥
VKO 90X110X400_ZM				502			1,72	🔥
VKO 90X110X500_S	500	110	505	502	15	1,00	2,12	🔥
VKO 90X110X500_F				296			2,46	🔥
VKO 90X110X500_ZM				502			2,12	🔥
VKO 90X110X600_S	600	110	605	502	15	1,00	2,52	🔥
VKO 90X110X600_F				296			2,92	🔥

 WARNUNG**Gefahr von Schnittverletzungen**

Obwohl unsere Kabelrinnen mit äußerster Sorgfalt hergestellt werden, um scharfe Kanten zu minimieren, ist es wichtig, beim Tragen, Greifen und Arbeiten Schutzhandschuhe zu tragen.

Gefahr von Stromschlag

Da die einzelnen Komponenten des Kabeltragsystems aus elektrisch leitendem Material bestehen, darf nicht in der Nähe von unter Spannung stehenden Teilen gearbeitet werden. Die Nichteinhaltung der Sicherheitsvorschriften kann zu schweren Verletzungen oder zum Tod führen.

Sichere Anwendung

Unter normalen und vorhersehbaren Verwendungsbedingungen stellt es keine Gefahr für den Verbraucher dar, sofern es ordnungsgemäß Installation und Anwendung in Übereinstimmung mit der Installationsanleitung.

Recycling-Zeichen:



VKO