
DATA SHEET


elbow 90° for cable cover


www.kopos.com

type number	A (mm)	B (mm)	C (mm)	D (mm)	thickness of metal sheet (mm)	weight (kg/pc)	
O90-OKK 20x25_S	25,6	20,9	36,3	16	0,55	0,013	
O90-OKK 20x25_EO						0,014	
O90-OKK 20x40_S	40,6	20,9	55,5	22	0,55	0,025	
O90-OKK 20x40_EO						0,028	
O90-OKK 40x60_S	60,6	40,9	79,8	28	0,55	0,060	
O90-OKK 40x60_EO						0,067	







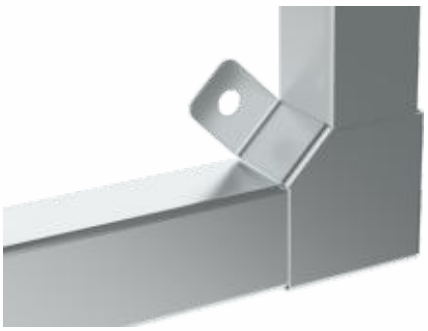

product description: The elbow is intended for branching the OKK protective cover within the same width.

Fixing to the base material is carried out using SB 6.3×35 or SB 6.3×45 concrete screws, or KPO 6 anchors.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm

EO - epoxy-polyester powder paint - perimeter paint RAL 9003

sales amount: á 1 pc

meets the requirements: ČSN EN IEC 61084-1

classification: ČSN 73 0895 P 30-R

DIN 4102-12 E 30

STN 92 0205 P S 30

Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Cable management systems - Fire resistant systems.

storage: ČSN EN 60721-3-1

⚠ WARNING

Risk of injury from cutting

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

Electricity injury

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

Safe Use

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:

40 FE O90-OKK

2-30/10/2026 KOPOS KOLÍN a.s., Havlíčkova 432, 280 02, Kolín IV, Česká republika